


## Cutter Blades for the C-Monster, Wart, Mini, Prepzilla, Commander, Dictator and Terminator MILLHOG®


For a custom blade request please fill in the appropriate information in the Your Spec column.

### Specifications for "V" Prep Custom Blades

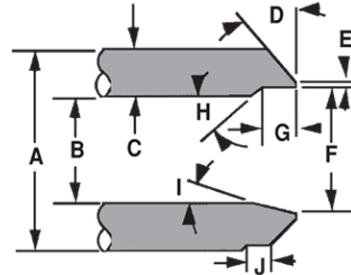

	Standard	Your Spec.
A	Tube O.D.	—
B	Tube I. D.	—
C	Wall thickness	—
D	Bevel Angle	37-1/2°
E	Land or Face	—
F	Bore Dia.	—
G	Depth of Bore	3/8
H	Taper Angle	18°
I	Bore Angle	10°
J	Peel Back	1/4"

### Specifications for "J" Prep Custom Blades

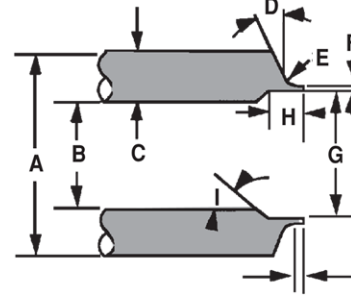

	Standard	Your Spec.
A	Tube O.D.	—
B	Tube I. D.	—
C	Wall thickness	—
D	Bevel Angle	22°
E	Radius	3/16
F	Land or Face	—
G	Bore Dia.	—
H	Bore Depth	3/8
I	Bore Taper	18°
J	Nose (Straight)	—
K	Tapered bore angle instead of straight bore	10°

**MBB-1** 37-1/2° Bevel Blade TIN 1/2" wide (12.7mm)

**MBB-2** 37-1/2° Bevel Blade TIN 3/4" wide (19.1mm)

**MBB-3** 37-1/2° Bevel Blade TIN 1" (25.4mm)

**MBB-4** 37-1/2° Bevel Blade TIN 1-1/4" wide (31.8mm)

**MBB-1 HL** 37-1/2° Bevel Blade Hard Lube (12.7mm)

**MBB-2 HL** 37-1/2° Bevel Blade Hard Lube 3/4" wide (19.1mm)

**MBB-3HL** 37-1/2° Bevel Blade Hard Lube 1" (25.4mm)

**MBB-4 HL** 37-1/2° Bevel Blade Hard Lube 1-1/4" wide (31.8mm)

**MBB-5** 37-1/2° x 10° Bevel Blade TIN 1-1/4" wide (31.8mm)

**MBB-6** 10° Bevel Blade TIN 1" wide (25.4mm)

**MBB-7** 30° Bevel Blade TIN 1/2" wide (12.7mm)

**MBB-8** 30° Bevel Blade Tin 3/4" wide (19.1mm)

**MBB-9** 30° Bevel Blade TIN 1" (25.4mm)

**MBB-10** 30° Bevel Blade TIN 1-1/4" wide (31.8mm)

**MBB-4A** 45° Bevel Blade TIN 1/2" wide (12.7mm)

**MBB-5A** 45° Bevel Blade TIN 3/4" wide (19.1mm)

**MBB-6A** 45° Bevel Blade TIN 1" (25.4mm)

**MLB-1** Land Blade TIN 1/2" wide (12.7mm)

**MLB-2** Land Blade TIN 3/4" wide (19.1mm)

**MLB-3** Land Blade TIN 1" (25.4mm)

**MJB-1** "J" Bevel TIN 1/2" wide (12.7mm) (Standard Bevel = 22°) (Standard Radius = 3/16" / 4.7mm)

**MJB-2** "J" Bevel TIN 3/4" wide (19.1mm) (Standard Bevel = 22°) (Standard Radius = 3/16" / 4.7mm)

**MJB-3** "J" Bevel TIN 1" (25.4mm) (Standard Bevel = 22°) (Standard Radius = 3/16" / 4.7mm)

**MJB-4** "J" Bevel TIN 1-1/4" wide (31.8mm) (Standard Bevel = 22°) (Standard Radius = 3/16" / 4.7mm)

**MBBP-1** 37-1/2° + 14° (6.35mm) Peel Back TIN 1/2" wide (12.7mm)

**MBBP-2** 37-1/2° + 14° (6.35mm) Peel Back TIN 3/4" wide (19.1mm)

**MBBP-2HL** 37-1/2° + 14° (6.35mm) Peel Back Hard Lube 3/4" wide (19.1mm)

**MCB-1** Counter Bore Blade TIN 1/2" wide (12.7mm)

**MCB-2** Counter Bore Blade TIN 3/4" wide (19.1mm)

**MCB-3** Counter Bore Blade TIN 1" wide (25.4mm)

**MCB10S-1** 10° Boring Blade TIN 1/2" wide (12.7mm) For I.D. smaller than 1.75" (44.4mm)

**MCB10S-2** 10° Boring Blade TIN 3/4" wide (19.1mm) For I.D. smaller than 1.75" (44.4mm)

**MTSR-1** Tube Stub Removal Blade TIN 1/2" wide (12.7mm)

**MTSR-2 TIN** Tube Stub Removal Blade TIN 3/4" wide (19.1mm)

**MTSR-3** Tube Stub Removal Blade TIN 1" wide (25.4mm)

**MTSS-1** Tube Seat Blade TIN 1/2" wide (12.7mm)

**MTSS-2** Tube Seat Blade TIN 3/4" wide (19.1mm)

**MTSS-3** Tube Seat Blade TIN 1" wide (25.4mm)

**MRB-6** Membrane / Overlay Removal Insert (Golf T) 5/16" (8mm)

**MCBSS-1** 3/8" Straight Bore 18° Taper TIN 1/2" wide (12.7mm) For I.D. smaller than 1.75" (44.4mm)

**MCBSS-2** 3/8" Straight Bore 18° Taper TIN 3/4" wide (19.1mm) For I.D. smaller than 1.75" (44.4mm)

**MCBSS-3** 3/8" Straight Bore 18° Taper TIN 1" wide (25.4mm) For I.D. smaller than 1.75" (44.4mm)

**MCBSL-1** 3/8" Straight Bore 18° Taper TIN 1/2" wide (12.7mm) For I.D. larger than 1.75" (44.4mm)

**MCBSL-2** 3/8" Straight Bore 18° Taper TIN 3/4" wide (19.1mm) For I.D. larger than 1.75" (44.4mm)

**MCBSL-3** 3/8" Straight Bore 18° Taper TIN 1" wide (25.4mm) For I.D. larger than 1.75" (44.4mm)

**MRBB-1** Facing Blade TIN 1/2" wide (12.7mm)

**MRBB-2** Facing Blade TIN 3/4" wide (19.1mm)

**MLRB-1** Facing Blade w/ O.D. Radius TIN 1/2" wide (12.7mm)

**MLRB-2** Facing Blade w/ O.D. Radius TIN 3/4" wide (19.1mm)

**MLRB-3** Facing Blade w/ O.D. Radius TIN 1" wide (25.4mm)